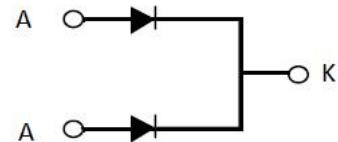


**SCHOTTKY RECTIFIERS****Features:**

- High ESD capacity
- High reliability
- High frequency operation
- Low forward voltage
- High surge capacity

**Applications:**

- Switching mode power supply
- High frequency inverter circuit
- Polarity protection circuit



Product Summary	
V <sub>R</sub>	60 V
I <sub>F(AV)</sub>	2*10A
T <sub>j</sub>	125°C
V <sub>F(max.)</sub>	0.75V

**Absolute Maximum Ratings**

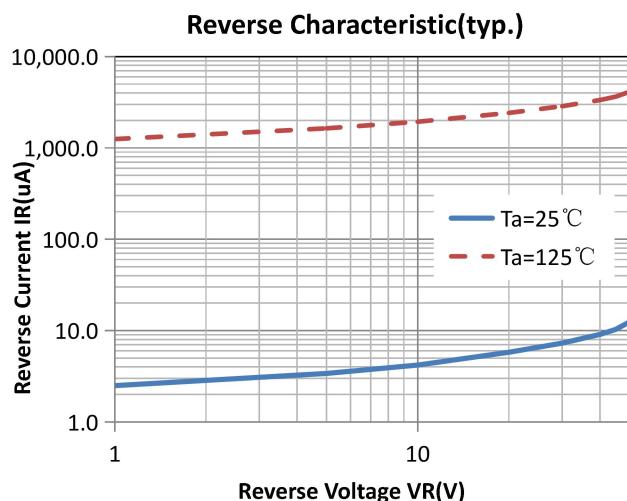
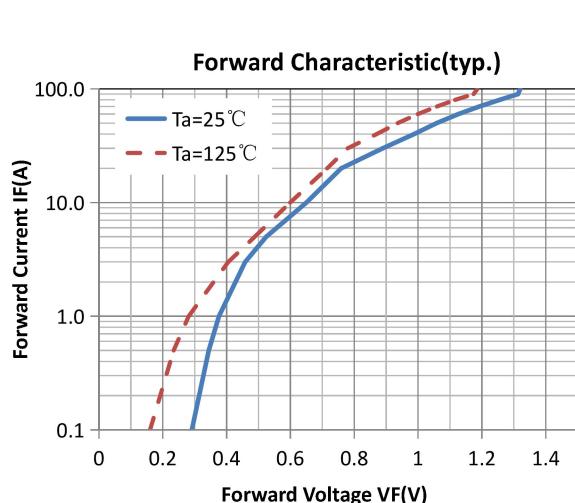
Parameter	Symbol	Values	Units
Repetitive peak reverse voltage	V <sub>RRM</sub>	60	V
Continuous forward current	I <sub>F(AV)</sub>	20	A
Single pulse forward current	I <sub>FSM</sub>	200	
Operating junction	T <sub>j</sub>	125	°C
Storage temperatures	T <sub>stg</sub>	-55 to +125	°C
Peak Repetitive Reverse Surge Current	I <sub>RRM</sub>	5	A

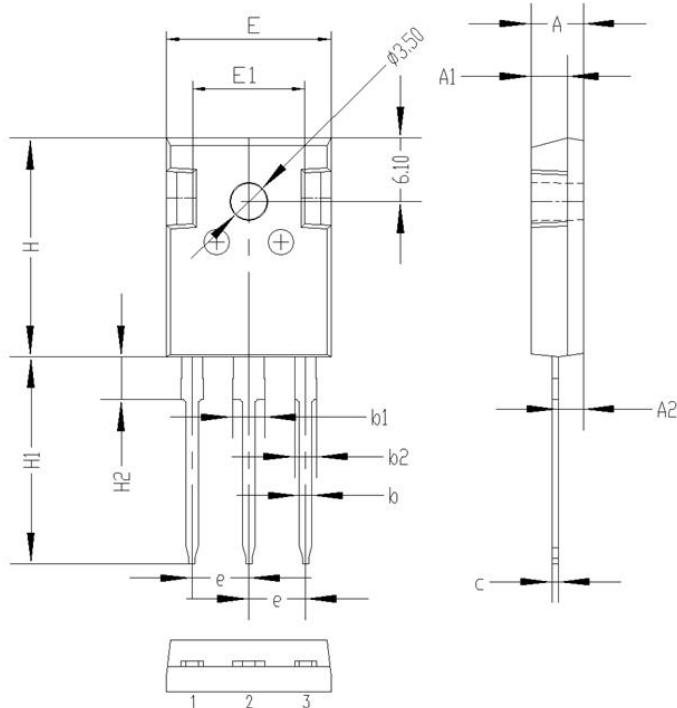
**Electrical characteristics (Ta=25°C unless otherwise specified)**

Parameter	Symbol	Test Conditions	Min	Typ.	Max.	Units
Breakdown voltage Blocking voltage	V <sub>BR</sub> , V <sub>R</sub>	I <sub>R</sub> =100μA	60			V
Forward voltage (Per Diode)	V <sub>F</sub>	I <sub>F</sub> =10 A		0.66	0.75	
		I <sub>F</sub> =10 A, T <sub>j</sub> =125°C		0.60	0.70	
Reverse leakage current(Per Diode)	I <sub>R</sub>	V <sub>R</sub> = V <sub>RRM</sub>			120	μA
		T <sub>j</sub> =125°C , V <sub>R</sub> =60V			20	mA

**Thermal characteristics**

Parameter	Symbol	Typ.	Units
Junction-to-Case	R <sub>θJC</sub>	0.8	°C /W

**Electrical performance (typic)**


**Package Information****TO-247 PACKAGE**

Symbol	Dimensions(millimeters)	
	Min.	Max.
A	4.80	5.20
A1	3.30	3.70
A2	2.10	2.50
b	1.00	1.40
b1	2.90	3.30
b2	1.90	2.30
c	0.40	0.80
e	5.25	5.65
E	15.6	16.0
E1	10.6	11.00
H	20.8	21.2
H1	19.4	20.4
H2	3.90	4.30
G	5.90	6.30
ΦP	3.30	3.70